

**Five Different Sized Vacuums,  
Designed for any Commercial or Industrial Application,  
Provide a World of Choice to Suit Your Cleaning Requirements.**



These five economical vacuum cleaners offer modern design and rugged durability. All models come complete with accessory kit.

All models (except 42oRT) come equipped with a power nozzle receptacle to add versatility and adaptability for use with a power head.

The wet/dry models have a two-stage, ball-bearing by-pass motor, the most dependable separate cooling motor on the market for wet/dry pickup.

All vacuum motors are insulated and meet the rigorous commercial regulations necessary to be CSA approved. Chemical and wear resistant polypropylene tanks will not rust or dent. These resilient tanks are long-lasting and easy to maintain.

**One year limited warranty on parts and labour.**

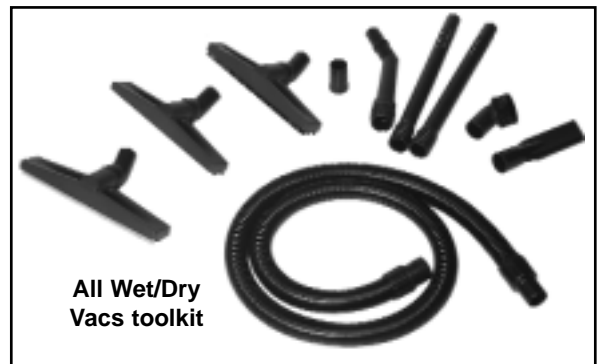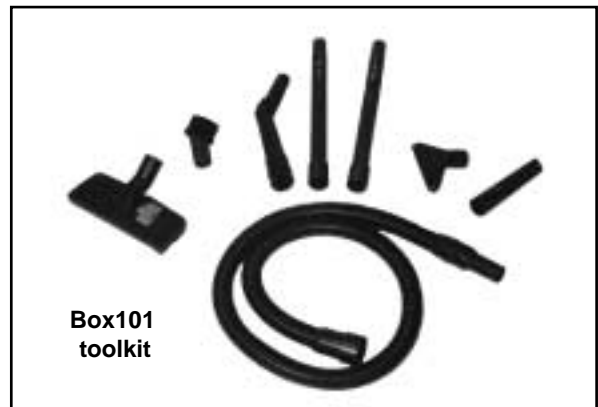

Specifications	101Box	315C	415MC	315R	420RT
Rated Horsepower	1.25	1.5	1.5	1.5	2 x 1.5
Motor Type	2-stage flow-thru	2-stage bypass	2-stage bypass	2-stage bypass	2x2-stage bypass
Rated Amps	6.5	8.5	8.5	8.5	14.5
Rated Volts	120 AC	120 AC	120 AC	120 AC	120 AC
Tank Construction	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene
Total Capacity	9 L (2.0 Imp.gal.) (2.4 U.S.gal.)	43 L (9.5 Imp.gal.) (11.4 U.S.gal.)	90 L (20.0 Imp.gal.) (24.0 U.S.gal.)	23 L (5.1 Imp.gal.) (6.1 U.S.gal.)	71 L (15.8 Imp.gal.) (19.0 U.S.gal.)
Recoverable Capacity	5 L (1.1 Imp.gal.) (1.3 U.S.gal.)	27 L (6.0 Imp.gal.) (7.1 U.S.gal.)	64 L (14.0 Imp.gal.) (16.8 U.S.gal.)	16 L (3.5 Imp.gal.) (4.2 U.S.gal.)	51 L (11.2 Imp.gal.) (13.5 U.S.gal.)
Waterlift (at closed orifice)	71 inches	87 inches	87 inches	87 inches	87 inches
C.F.M. (at tank orifice)	83	101	101	101	170
Motor RPM at full load	16,000	17,700	17,700	17,700	17,700
Noise Level (1.5m/5ft.)	65 dB	75 dB	75 dB	75 dB	75 dB
Filter Surface Area	150 sq.in.	375 sq.in.	675 sq.in.	375 sq.in.	675 sq.in.
Hose Size	1 1/4" X 7 ft.	1 1/2" X 8.5 ft.	1 1/2" X 8.5 ft.	1 1/2" X 8.5ft.	1 1/2" X 8.5 ft.
Cable Length	28 feet	28 feet	28 feet	28 feet	28 feet
Casters/Wheels	1 3/4" (4)	2" (4)	3" (2) - 8" (2)	1 3/4" (4)	3" (2) - 8" (2)
Overall Height	21"	27"	35"	25"	40"
Accepts Front Squeegee	No	No	Yes	No	Yes
Net Weight (without access.)	14 lbs.	22 lbs.	41 lbs.	20 lbs.	54 lbs.
Shipping Weight (w/access.)	24 lbs.	34 lbs.	56 lbs.	32 lbs.	63 labs.
Use	Dry Only	Wet/Dry	Wet/Dry	Wet/Dry	Wet/Dry
Optional Paper Bags	Yes (#0147)	Yes (#2741)	No	Yes (#2741)	No
Standard Tool Kits Incl.	Dry Tool Kit	Wet/Dry Tool Kit	Wet/Dry Tool Kit	Wet/Dry Tool Kit	Wet/Dry Tool Kit



### Optional Accessories

#### 24" Front-mounted Squeegee

(optional)

#### Cap 175 Powerhead

(optional)

Elbow and adaptor kit sold separately  
\* to ensure proper kit is provided  
specify model of vacuum  
when ordering powerhead

